DSC

Technical Advisory Bulletin


Date: Thursday, November 20, 2008 Number: TAB-08-011

To: North American Sales Channel

Notice: GS3060 & GS3055-ICF Trouble Supervision

To ensure proper notification of troubles on the GS3060 & the GS3055-ICF, it is strongly recommended that output 4 on the GS3060 be connected to a zone on the control panel. The zone should be programmed as a 24 Hour Supervisory which will annunciate at the keypad when a GS3060 or GS3055-ICF trouble is present.

Detailed information on wiring output 4 to the zone is contained in the GS3060 Installation Manual in the Wiring Diagrams section and is reproduced below. This information is also pertinent to the GS3055-ICF.

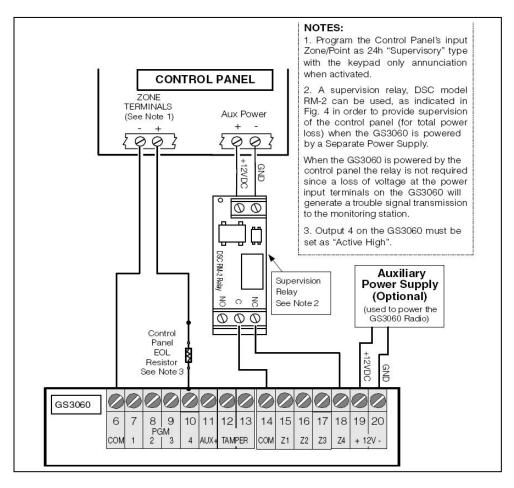

For further information, please contact DSC Technical Support at 800-387-3630 or tech@dsc.com.