

Date: Friday, May 25, 2007


Number: TAB 07-003

To: North America Sales Channel

Notice: GS3055-I Trouble Supervision

To ensure proper notification of troubles on the GS3055-I, it is strongly recommended that output 4 on the GS3055-I is connected to a zone on the control panel. The zone should be programmed as a 24 Hour Supervisory which will annunciate at the keypad when a GS3055-I trouble is present.

Detailed information on wiring output 4 to the zone is contained in the GS3055-I Installation Manual in the Wiring Diagrams section and is reproduced below.

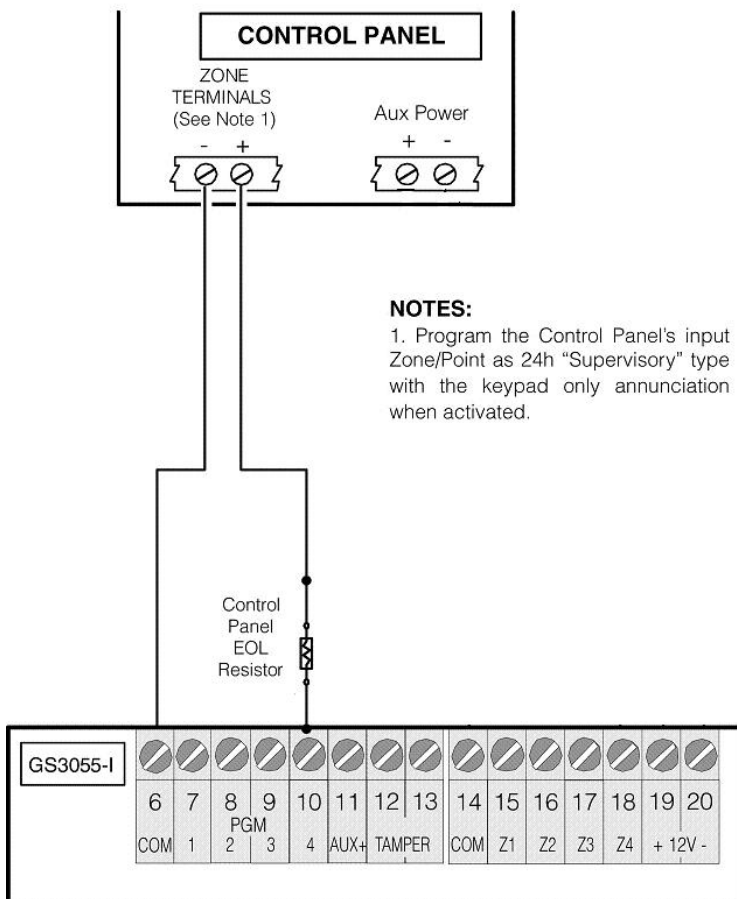

For further information, please contact DSC Technical Support at 800-387-3630 or tech@dsc.com.