

Addressable Expansion



AMP-700/AMP-701
AMP-702/AMP-704
Addressable Contact Modules



AMB-500
Addressable Ceiling-Mount
Passive Infrared Detector



AMB-300
Addressable Passive
Infrared Detector



AML-770B
Loop Isolator Module



AMX-400
Loop Repeater/
Isolator Module

Access Control



Readers *
MAXSYS supports a wide range of 26-bit Weigand readers: Polaris™, ioProx™, Shadowprox™, HID and Kantech XSF Technologies




T-Rex *
Request-to-Exit Detector



PC4820
2-Reader Access Control Module

* To order visit www.kantech.com

Wireless Expansion

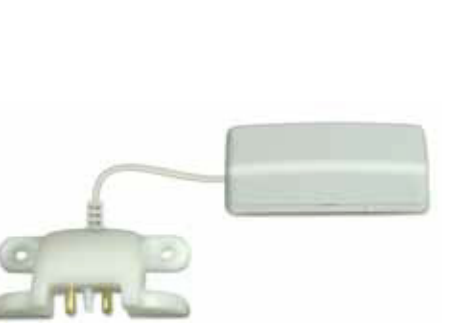

WS4985
Wireless Flood Detector



EV-DW4927
Wireless Shock Sensor with
Built-In Door/Window Contact



WS4904P
Wireless Passive
Infrared Detectors



WS4945
Wireless Pet-Immune
Passive Infrared Detector



WLS922L-433
Wireless Glass-Break
Detector



EV-DW4917
Wireless Recessed
Door Transmitter



WS4965
Tri-Zone Wireless Door/
Window Contact



RF4164-433
Wireless Receiver
Supports:
- 64 Wireless Zones
- 16 Wireless Keys



WS4936
Wireless Photoelectric
Smoke Detector



EV-DW4975
Vanishing Contact



WS4938
1-Button Personal Panic



WS4939
4-Button Wireless Key

Serial Interface



PC4401
Data Interface Module

Alternate Communication



LE4000/4010-AT
Universal Wireless
Alarm Communicator



T-LINK™ TL250
Internet Alarm
Communicator

Windows[®] Software



DLS2002SA
System
Administrator



DLS2002
Downloading
Software

Serial Interface



BV600
Dual-element, Pet-Immune
PIR Motion Detector



AC100/AC500
Glassbreak Detector



LC-100-PI
PIR Detector
with Pet-Immunity

Intrusion



PC4108/PC4116
8/16 Hardwire
Zone Expanders




PC4204/PC4204CX
Power Supply/Relay
Output/Combus Repeater
Module



PC4216
16 Programmable
Output Module



LCD4501
Programmable - Message
LCD Keypad

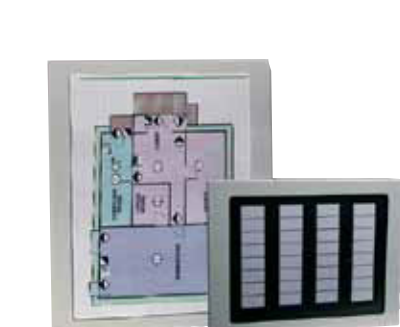

PC4632/4664
32/64 Point Graphic
Annunciators

Automation



ESCORT™ 4580
Telephone Interface and
Automation Control Module



**Local/Remote Control
with Voice Prompt**