
Digital Security Controls

Publications Cover Sheet

Part Number: 29034658R002

Revision: 002

Release Number: 5829

Notes: 1) Updated for reflecting modifications of cabinet and door metalwork to improve locking performance, 2) Removed info for HS-FDR & HS-PDR, 3) Added note for Safety, 4) Removed FCC Compliance Statement, 5) Updated Concourse logo & DSC info.

Description: Concourse Door Installation Sheet;
Medium; Large; Extra Large

Type: 33-01 8.5 x 11 White (Paper)

Pieces: 0.5 (2 up)

Printing Instructions: Master Size: 8.5 X 11

Number of Sheets in Master: 2


2 - Sided Printing

Cover Printing Not Required

Finishing: Not Applicable

Notes: Finished Sheet Size: Half-Letter
(5.5 in x 8.5 in)

Figure 1, HS-LDR Installation

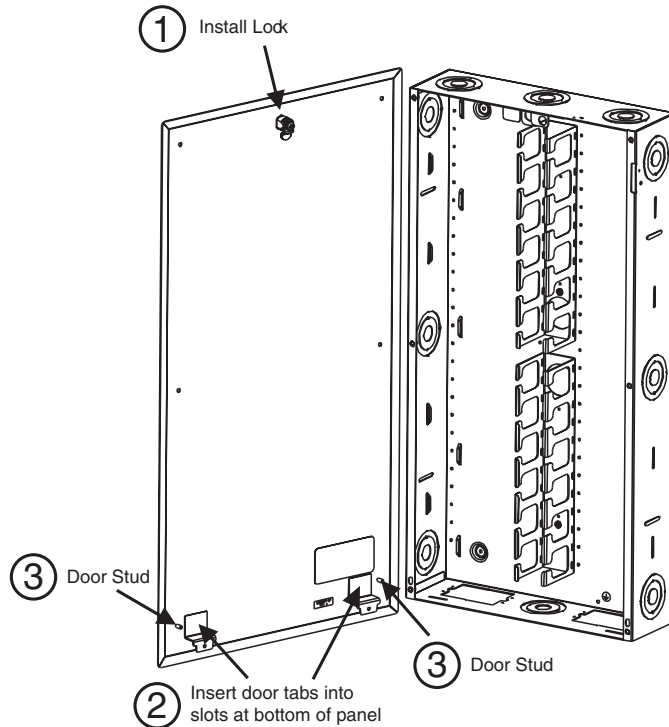

Limited Warranty

Digital Security Controls warrants that for a period of 12 months from the date of purchase, the product shall be free of defects in materials and workmanship under normal use and that in fulfillment of any breach of such warranty, Digital Security Controls shall, at its option, repair or replace the defective equipment upon return of the equipment to its repair depot. This warranty applies only to defects in parts and workmanship and not to damage incurred in shipping or handling, or damage due to causes beyond the control of Digital Security Controls such as lightning, excessive voltage, mechanical shock, water damage, or damage arising out of abuse, alteration or improper application of the equipment.

The foregoing warranty shall apply only to the original buyer, and is and shall be in lieu of any and all other warranties, whether expressed or implied and of all other obligations or liabilities on the part of Digital Security Controls. Digital Security Controls neither assumes responsibility, nor authorizes any other person purporting to act on its behalf to modify or to change this warranty, nor to assume for it any other warranty or liability concerning this product.

In no event shall Digital Security Controls be liable for any direct, indirect or consequential damages, loss of anticipated profits, loss of time or any other losses incurred by the buyer in connection with the purchase, installation or operation or failure of this product.

WARNING: Digital Security Controls recommends that the entire system be completely tested on a regular basis. However, despite frequent testing, and due to, but not limited to, criminal tampering or electrical disruption, it is possible for this product to fail to perform as expected

IMPORTANT INFORMATION: Changes or modifications not expressly approved by Digital Security Controls could void the user's authority to operate this equipment.

This Installation Manual shall be used in conjunction with the Installation Manual(s) of the hosted equipment.



Introduction

The HS-LDR series of cabinet doors are intended for use with the HS-CAB series of Cabinets including HS-CAB1000, HS-CAB3000 and HS-CAB4000.

HS-LDR Series - steel plate doors that secure to the cabinet by inserting the door tabs into the slots and pins provided at the bottom of the cabinet and locking in place.

Contents of Package

- Qty (1) Concourse Label for insertion into Label panel provided.
- Qty (1) Lock (purchase separately)
- Qty (4) Mounting Screws

	HS-CAB1000	HS-CAB3000	HS-CAB4000
	HS-LDR1000	HS-LDR3000	HS-LDR4000
HS-LDR Series	Height 15.3in (389mm)	Height 29.6in (752mm)	Height 43.9 in (1115mm)
Locking Door	Width 15.3 (389mm)	Width 15.3 (389mm)	Width 15.3 (389mm)

Installation


HS-LDR Series

Locking Doors Installation

1. Install the lockset into the opening (1) provided at the top of the door (if locks used).
2. Affix the Concourse label to the front of the door in the area provided.
3. Slide the door tabs (2) at the bottom of the door into the slots in the bottom of the cabinet with door at suitable angle to cabinet surface.
4. Push the top of the door towards the cabinet until door studs (3) at bottom engage cabinet holes and door is fully closed.
5. Insert the key into the lock and turn to lock the cabinet, if locks used. Otherwise, attach with screws.

NOTE: Maximum screw torque 25 lb in (2.8 Nm).

Figure 1, HS-LDR Installation

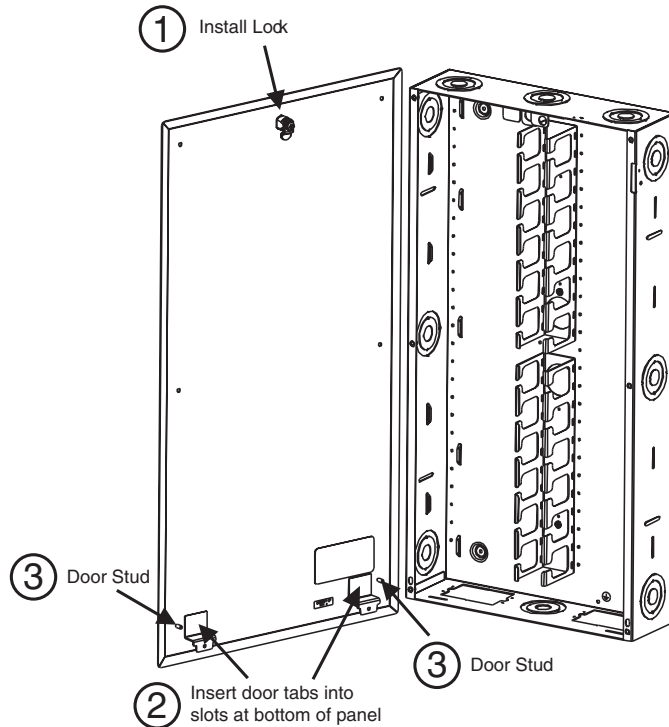

Limited Warranty

Digital Security Controls warrants that for a period of 12 months from the date of purchase, the product shall be free of defects in materials and workmanship under normal use and that in fulfillment of any breach of such warranty, Digital Security Controls shall, at its option, repair or replace the defective equipment upon return of the equipment to its repair depot. This warranty applies only to defects in parts and workmanship and not to damage incurred in shipping or handling, or damage due to causes beyond the control of Digital Security Controls such as lightning, excessive voltage, mechanical shock, water damage, or damage arising out of abuse, alteration or improper application of the equipment.

The foregoing warranty shall apply only to the original buyer, and is and shall be in lieu of any and all other warranties, whether expressed or implied and of all other obligations or liabilities on the part of Digital Security Controls. Digital Security Controls neither assumes responsibility, nor authorizes any other person purporting to act on its behalf to modify or to change this warranty, nor to assume for it any other warranty or liability concerning this product.

In no event shall Digital Security Controls be liable for any direct, indirect or consequential damages, loss of anticipated profits, loss of time or any other losses incurred by the buyer in connection with the purchase, installation or operation or failure of this product.

WARNING: Digital Security Controls recommends that the entire system be completely tested on a regular basis. However, despite frequent testing, and due to, but not limited to, criminal tampering or electrical disruption, it is possible for this product to fail to perform as expected

IMPORTANT INFORMATION: Changes or modifications not expressly approved by Digital Security Controls could void the user's authority to operate this equipment.

This Installation Manual shall be used in conjunction with the Installation Manual(s) of the hosted equipment.



HS-LDR Series - Cabinet Doors
Installation Instructions

Introduction

The HS-LDR series of cabinet doors are intended for use with the HS-CAB series of Cabinets including HS-CAB1000, HS-CAB3000 and HS-CAB4000.

HS-LDR Series - steel plate doors that secure to the cabinet by inserting the door tabs into the slots and pins provided at the bottom of the cabinet and locking in place.

Contents of Package

- Qty (1) Concourse Label for insertion into Label panel provided.
- Qty (1) Lock (purchase separately)
- Qty (4) Mounting Screws

	HS-CAB1000	HS-CAB3000	HS-CAB4000
	HS-LDR1000	HS-LDR3000	HS-LDR4000
HS-LDR Series	Height 15.3in (389mm)	Height 29.6in (752mm)	Height 43.9 in (1115mm)
Locking Door	Width 15.3 (389mm)	Width 15.3 (389mm)	Width 15.3 (389mm)

Installation

HS-LDR Series

Locking Doors Installation

1. Install the lockset into the opening (1) provided at the top of the door (if locks used).
2. Affix the Concourse label to the front of the door in the area provided.
3. Slide the door tabs (2) at the bottom of the door into the slots in the bottom of the cabinet with door at suitable angle to cabinet surface.
4. Push the top of the door towards the cabinet until door studs (3) at bottom engage cabinet holes and door is fully closed.
5. Insert the key into the lock and turn to lock the cabinet, if locks used. Otherwise, attach with screws.

NOTE: Maximum screw torque 25 lb in (2.8 Nm).